



# i3HUDDLE 2.0

## W5510 4K

A PLUG & PLAY TOTAL MEETING ROOM SOLUTION THAT ALLOWS YOU TO FOCUS ON DOING YOUR JOB

Walk up to the display, draw, annotate, share and convert. No training required; it is straightforward and intuitive. i3HUDDLE is a simple, hassle-free meeting solution that connects people in a secure environment. Whether doing an online sales demo, setting up a meeting with colleagues in another location or hosting a web conference, interactive meeting has never been easier than with the i3HUDDLE total meeting solution. i3HUDDLE – your efficient and secure meeting solution around your conference table or halfway across the world.

### INTERACTIVE

- Connects professionals in a secure environment
- C-Sense touch technology: Finger or stylus recognition
- Multi-user interaction with up to 40 touch points
- Very accurate: even the slightest touch is registered as input

### INSPIRING

- Dynamic backgrounds
- Facilitates online presentations, trainings or demos
- Intuitive, no training required
- Reduces travel time, increases efficiency, saves time
- High durability
- Extremely precise and responsive
- Increased product life span

### INTEGRATED

- Wireless presenting tool with i3SYNC Touch
- Quick whiteboarding with i3NOTES
- i3MEETINGHUB the next generation collaboration suite
- Browse immediately on the web
- Save on travel expenses by organizing online meetings
- Explore and manage your files in an obvious way
- Meeting room planner for a clear overview of meetings
- Enhance efficiency with several productivity apps
- 4 mm Anti-Reflexion safety glass
- Professional panel for 24/7 use
- Equipped with sound bar for premium quality audio
- Warranty: 3 years\* and 48 hours onsite swap service



### CAPACITIVE TOUCH TECHNOLOGY

A capacitive touchscreen, as smartphones and tablets, uses the electrical properties of the human body. The human body is conductive, meaning electricity can pass through it. So when you touch a capacitive screen with the tip of your finger (think of it as another electrical conductor), you cause a change in the screen's electrical field. Even the slightest touch of your finger will be measured. C-SENSE is by far the most accurate and precise touch technology, with unequalled user experiences as a result.



### PROTECT YOUR INVESTMENT

Our enhanced service programs and extended warranties are designed to keep your system running smoothly. From on-site service to advanced exchange options, we're committed to providing the very best service, through our network of partners. Standard the i3Huddle product comes with a 3 year warranty\* and 48 hour onsite swap service. Simply call our local service number indicated on your units, or your IT/AV professional.

*\*optional warranty extension available to 5 or 7 years*




i3-TECHNOLOGIES

1-1. Panel	
Diagonal size	55 inch (1387.8cm)
Panel Resolution	3840 x 2160 @60Hz
Brightness	500 cd/m <sup>2</sup> (Typical)
Contrast ratio	1100 : 1 (Typical)
Response time	8 ms (Typical)
Aspect ratio	16 : 9
Display colors	10 bit, 1.07 Billion colors
Viewing angle horizontal/vertical	178° / 178°
Pixel pitch (mm)	0.315(H) x 0.315(V) / RGB vertical stripe
Back light unit	Edge type LED
Life time (MTTF)	50,000 Hour
1-2. Connectivity	
RS232 (x2)	SoundBar Interface : Male Type RS232 : Female Type
Ethernet	Gigabit Ethernet / RJ45 JACK
Audio output	SPDIF
USB (x2)	1x USB for data 1x USB for webcam
OPS port	Yes
Antenna	Wi-Fi Antenna
1-3. Touch device	
Touch Technology	PCT(Projected Capacitive Technology)
Air Gap	5.0mm
Number of sensors	174 x 98 Line
Sensor pitch	7.00mm
Cover Glass type	Tempered Glass with AG coating
Cover Glass thickness	4.00mm(Typ)
Accuracy	± 1.5 mm
Response time	10ms
Input method	Finger, Passive stylus
Supported OS	Windows, Android, Linux, Mac, Web OS
Touch Points	40 points(max)

1-4. Features	
	<b>Video</b>
Color temperature	Normal / Warm / Cool / User
Picture mode	Standard / Dynamic / Soft / User
Zoom mode	Normal / Zoom / Cinema / Wide / User
	<b>Sound</b>
Surround Sound	On/Off
Sound mode	Standard / Music / Movie / Sports / User
Output	8W 2ch
1-5. Mechanical	
Outline dimension (mm)	1297.9 x 867.5 x 90.0
Packing dimension (mm)	1500.0 x 1045.0 x 300.0
Product weight (Kg)	55
Packing weight (Kg)	64.23
Mount type (mm)	VESA 300(H) x 300(V)
1-6. Reliability	
Power input range	100V-240V~, 50-60Hz, 5A
Max power consumption	TBD
Standby power	TBD
Temperature	Operating : 0~40°C Storage : -20~60°C
Humidity	Operating : 80% below Storage : 90% below
Installation	Stand or wall mount.
Viewing orientation	Landscape only
1-7 SoundBar	
Speaker	140W 2ch (Stereo 70W + 70W)
Audio Input	SET-IF / SPDIF / AUX / Bluetooth
KEY	MUTE / VOL- / FUNCTION / VOL+ / Wireless Audio

**TECHNICAL DRAWING**

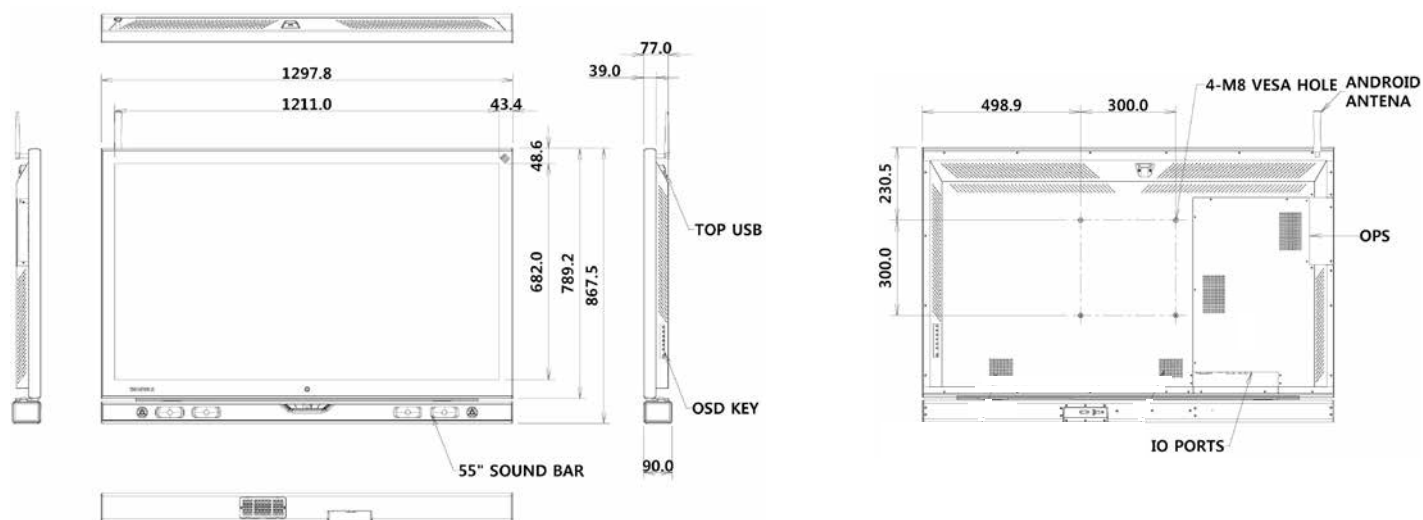

**AUTHORISED DISTRIBUTOR**